

# SPECIFICATION FOR APPROVAL

CUSTOMER : \_\_\_\_\_

PRODUCT TYPE : SMD SEAM SEALING X'TAL 3.2\*2.5

NOMINAL FREQ. : 16.384000MHz

TXC P/N : 7M16300085

REVISION : A1

CUSTOMER P/N : \_\_\_\_\_

PM / SALES : \_\_\_\_\_

DATE : \_\_\_\_\_

CUSTOMER SIGNATURE & Date

\_\_\_\_\_

\_\_\_\_\_

- (1) TXC requires one copy returned with signature and title of authorized individual that signifies acceptance of the attached specifications.
- (2) Orders received and accepted by TXC after return of signed copy of specification will be produced per these specifications.
- (3) Any changes to these specifications must be agreed upon by both parties and new revision of the Product Specification Sheet will be issued.
- (4) Any issuance of purchase order prior to consigning back the Approval page of "Specification Sheets" from customers will be regarded as the agreement on the contents of these specifications.

Attachment: Product Specification Sheet

- 1
- 2
- 3
- 4
- 5

**RoHS Compliant**



# PRODUCT SPECIFICATION SHEET

PRODUCT TYPE : SMD SEAM SEALING X'TAL 3.2\*2.5

NOMINAL FREQ. : 16.384000MHz

TXC P/N : 7M16300085

REVISION : A1

| PE/RD   | QA  | MFG  |
|---|---|--|
|  |  |  |
| 18-Oct-06   | 20-Oct-06   | 19-Oct-06  |

**NOTE:**

- (1)Lead Free Products are "Directive 2002/95/EC of The European Parliament of 27 January 2003 on the restriction of the use of certain hazardous substances (RoHS) in electrical and electronic equipment" Compliant (Attachment: SGS Test Report).
- (2)Revision "Sx" is for engineering samples only. PE/RD's approval required.
- (3)Revision "Ax" is production ready. PE, QA and MFG's approval required

**RoHS Compliant**



**ELECTRICAL SPECIFICATIONS**

**Standard atmospheric conditions**

Unless otherwise specified, the standard range of atmospheric conditions for making measurement and tests are as follow:

- Ambient temperature : 25±5℃
- Relative humidity : 40%~70%

If there is any doubt about the results, measurement shall be made within the following limits:

- Ambient temperature : 25±3℃
- Relative humidity : 40%~70%

**Measure equipment**

Electrical characteristics measured by HP E5100A or equivalent.

**Crystal cutting type**




The crystal is using AT CUT (thickness shear mode).

**Unit Weight:**


0.018±0.001 g/pcs

|    | Parameters                | SYM. | Electrical Spec. |      |     |       | Notes                                       |
|----|---------------------------|------|------------------|------|-----|-------|---|
|    |                           |      | MIN              | TYPE | MAX | UNITS |   |
| 1  | Nominal Frequency         | FL   | 16.384000        |      |     | MHz   | -   |
| 2  | Oscillation Mode          | -    | Fundamental      |      |     | -     | -   |
| 3  | Load Capacitance          | CL   | 8                |      |     | pF    | -   |
| 4  | Frequency Tolerance       | -    | ±10              |      |     | ppm   | at 25 °C ± 3 °C                             |
| 5  | Frequency Tolerance       | -    | ±10              |      |     | ppm   | Over Operating Temp. Range (Reference 25°C) |
| 6  | Operating Temperature     | -    | -10              | ~    | 60  | °C    | -   |
| 7  | Aging                     | -    | ±3               |      |     | ppm   | 1st Year                                    |
| 8  | Drive Level               | DL   | -                | 50   | -   | uW    | -   |
| 9  | Effective Resistance Rr   | Rr   | -                | -    | 80  | Ω     | -   |
| 10 | Shunt Capacitance C0      | C0   | -                | -    | 5   | pF    | -   |
| 11 | Insulation Resistance     | -    | 500              | -    | -   | MΩ    | at DC 100V                                  |
| 12 | Storage Temperature Range | -    | -40              | ~    | 85  | °C    | -   |


**■ DIMENSIONS**

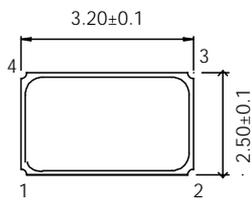

Internal View Connection




Bottom View



Suggest Layout

Units:mm

**■ MARKING**

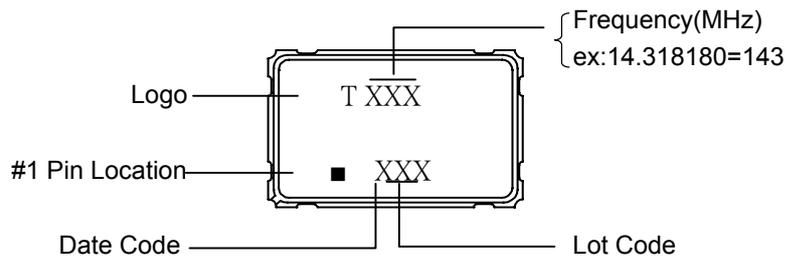

Production location:Taiwan

Date Code


| YEAR |      |      |      |      | MONTH |     |     |     |     |     |     |     |     |     |     |     |
|------|------|------|------|------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|      |      |      |      |      | JAN   | FEB | MAR | APR | MAY | JUN | JUL | AUG | SEP | OCT | NOV | DEC |
| 2001 | 2005 | 2009 | 2013 | 2017 | A     | B   | C   | D   | E   | F   | G   | H   | J   | K   | L   | M   |
| 2002 | 2006 | 2010 | 2014 | 2018 | N     | P   | Q   | R   | S   | T   | U   | V   | W   | X   | Y   | Z   |
| 2003 | 2007 | 2011 | 2015 | 2019 | a     | b   | c   | d   | e   | f   | g   | h   | j   | k   | l   | m   |
| 2004 | 2008 | 2012 | 2016 | 2020 | n     | p   | q   | r   | s   | t   | u   | v   | w   | x   | y   | z   |


This date code will be cycled every four years

**■ SUGGESTED REFLOW PROFILE**


Total time : 200 sec. Max.

Solder melting point :220 °C

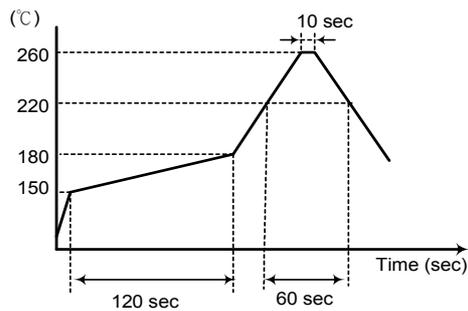


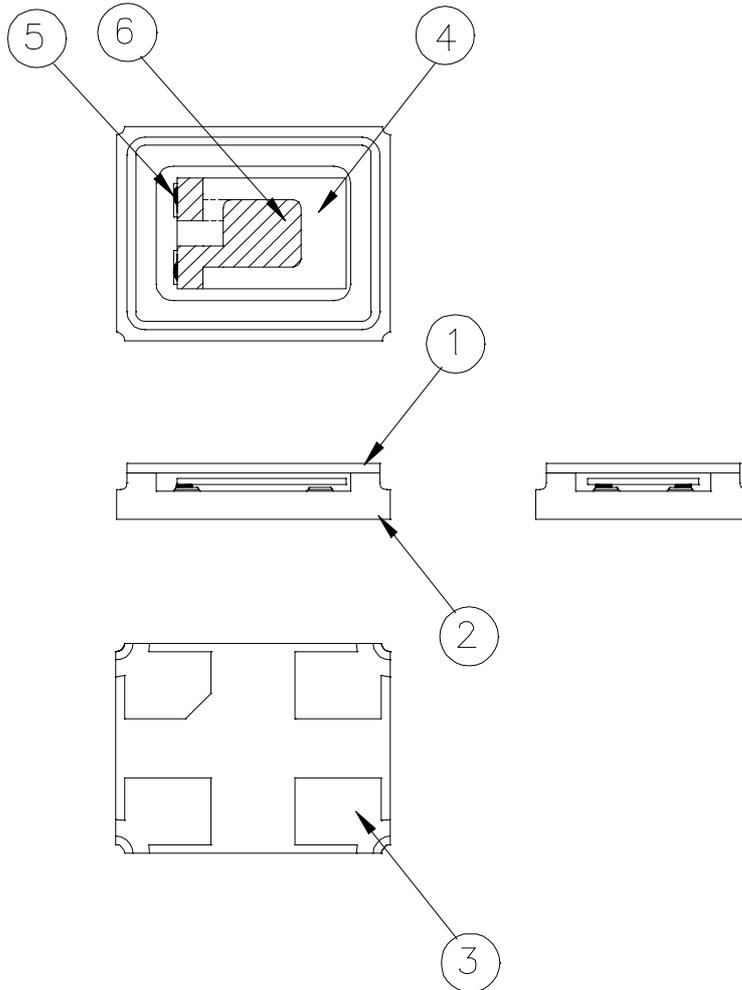
**■ STRUCTURE ILLUSTRATION**


| NO | COMPONENTS          | MATERIALS   | QTY | FINISH/SPECIFICATIONS                             |
|----|---------------------|---|-----|---|
| 1  | Lid                 | Kovar (Fe/Co/Ni)  | 1   | -   |
| 2  | Base(Package)       | Ceramic (Al <sub>2</sub> O <sub>3</sub> ) + Kovar (Fe/Co/Ni)+ Ag/Cu | 1   | Color black                                       |
| 3  | PAD                 | Au  | 4   | Tungsten metalize<br>+ Ni plating<br>+ Au plating |
| 4  | Crystal blank       | SiO <sub>2</sub>  | 1   | -   |
| 5  | Conductive adhesive | Ag  | 4   | Silicon resin                                     |
| 6  | Electrode           | Au + Cr   | 2   | -   |

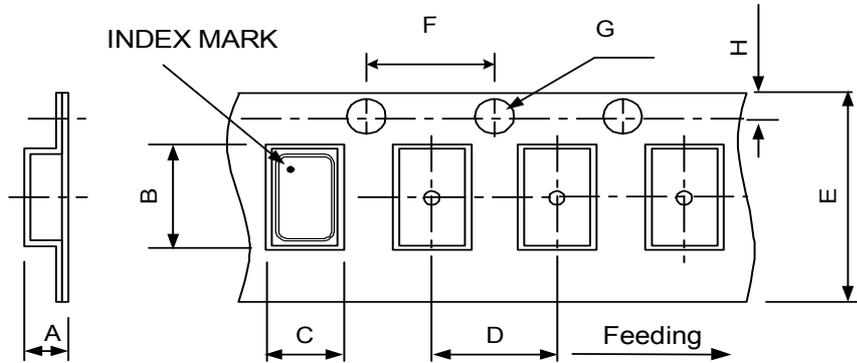**PACKING : (EIA-481-2)**


| DIMENSIONS | A    | B    | C    | D    | E    | F    | G    | H    |             |
|------------|------|------|------|------|------|------|------|------|-------------|
|            | 1.40 | 3.40 | 2.70 | 4.00 | 8.00 | 4.00 | 1.50 | 1.75 | (UNIT : mm) |

## REMARK :

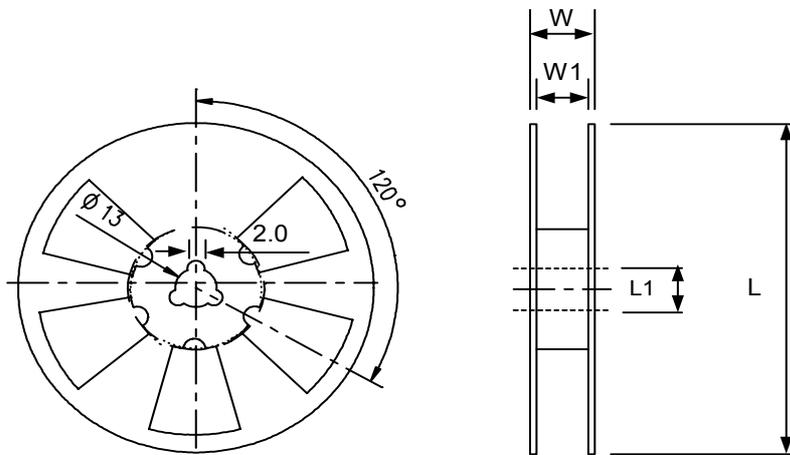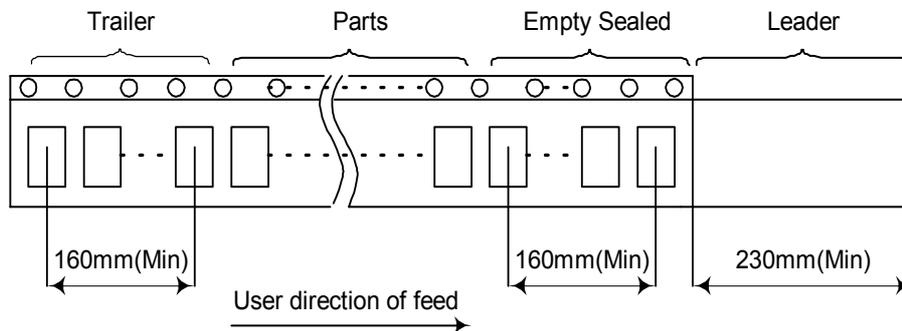

| DIMENSIONS | L   | L1 | W    | W1 | pcs / Reel (UNIT : mm)                       |
|------------|-----|----|------|----|--|
|            | 178 | 13 | 11.5 | 8  | Standard Reel Quantity is 3,000 pcs per reel |

## RELIABILITY SPECIFICATIONS

### 1. Mechanical Endurance

| No. | Test Item        | Test Methods   | REF.DOC      |
|-----|------------------|--|--------------|
| 1.1 | Drop Test        | 150 cm height, 3 times on concrete floor.  | JIS C6701    |
| 1.2 | Mechanical Shock | Device are shocked to half sine wave ( 1000 G ) three mutually perpendicular axes each 3 times. 0.5m sec. duration time                                  | MIL-STD-202F |
| 1.3 | Vibration        | Frequency range 10 ~ 2000 Hz<br>Amplitude 1.52 mm/20G<br>Sweep time 20 minute<br>Perpendicular axes each test time 4 hours<br>(Total test time 12 hours) | MIL-STD-883E |
| 1.4 | Gross Leak       | Standard Sample For Automatic Gross Leak Detector, Test Pressure: 2Kg / cm <sup>2</sup>  | MIL-STD-883E |
| 1.5 | Fine Leak        | Helium Bombing 4.5 Kg/ cm <sup>2</sup> for 2 hr  |              |
| 1.6 | Solder ability   | Temperature 245 °C ± 5°C<br>Immersing depth 0.5 mm minimum<br>Immersion time 5 ± 1 seconds<br>Flux Rosin resin methyl alcohol solvent ( 1 : 4 )          | MIL-STD-883E |

### 2. Environmental Endurance

| No. | Test Item                    | Test Methods   | REF. DOC     |
|-----|------------------------------|--|--------------|
| 2.1 | Resistance To Soldering Heat | Pre-heat temperature 125 °C<br>Pre-heat time 60 ~ 120 sec.<br>Test temperature 260 ± 5 °C<br>Test time 10 ± 1 sec. | MIL-STD-202F |
| 2.2 | High Temp. Storage           | + 125 °C ± 3 °C for 500 ± 12 hours   | MIL-STD-883E |
| 2.3 | Low Temp. Storage            | - 40 °C ± 3 °C for 500 ± 12 hours  |              |
| 2.4 | Thermal Shock                | Total 100 cycles of the following temperature cycle<br>  | MIL-STD-883E |
| 2.5 | High Temp & Humidity         | 85°C ± 3°C, RH 85% , 500Hrs  | JIS C5023    |
| 2.6 | Pressure Cooker Storage      | 121 ± 3°C , RH100% , 2 bar , 240Hrs  | JIS C6701    |