



SPECIFICATION FOR APPROVAL

CUSTOMER : _____

PRODUCT TYPE : SMD TSX 2.5 x 2.0

NOMINAL FREQ. : 26.000000MHz

TXC P/N : OZ26000013

REVISION : S1

CUSTOMER P/N : _____

PM / SALES : _____

DATE : _____

CUSTOMER CONFIRMATION : _____
(Signature)

_____ (Date)

- (1) TXC requires one copy returned with signature and title of authorized individual that signifies acceptance of the attached specifications.
- (2) Orders received and accepted by TXC after return of signed copy of specification will be produced per these specifications.
- (3) Any changes to these specifications must be agreed upon by both parties and new revision of the Product Specification Sheet will be issued.
- (4) Any issuance of purchase order prior to consigning back the Approval page of "Specification Sheets" from customers will be regarded as the agreement on the contents of these specifications.

MSL:Level 1
RoHS Compliant

(for glass crystal only : Pb used in sealing glass material is exempt from EU directive)



PRODUCT SPECIFICATION SHEET

PRODUCT TYPE : SMD TSX 2.5 x 2.0

NOMINAL FREQ. : 26.000000MHz

TXC P/N : OZ26000013

REVISION : S1

PE/RD	QA	MFG
Bruce Hsu		
Bruce Hsu		
27-Sep-16		

NOTE:

- (1) The green product standard set by TXC is based upon the international standards. Related information is publicly described on the TXC's Website, and updated regularly. The document is compliant with the latest green product quality system directives at the time.
- (2) Revision "Sx" is for engineering samples only. PE/RD's approval required.
- (3) Revision "Ax" is production ready. PE, QA and MFG's approval required.

**MSL:Level 1
RoHS Compliant**

(for glass crystal only : Pb used in sealing glass material is exempt from EU directive)

CRYSTAL ELECTRICAL SPECIFICATIONS

Standard Atmospheric Conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurement and tests are as follow:

Ambient temperature : $25 \pm 10^{\circ}\text{C}$
 Relative humidity : 40%~70%

If there is any doubt about the results, measurement shall be made within the following limits:

Ambient temperature : $25 \pm 3^{\circ}\text{C}$
 Relative humidity : 40%~70%

Measurement Equipment

Electrical characteristics measured by S&A 250B or equivalent.

Crystal Cutting Type

The crystal is using AT CUT (thickness shear mode)

Unit Weight:

0.0135 g / piece(TYP), 40 ± 2 g / 3 kpcs(regardless of tape weight)

	Parameters	Symbol	Condition	Electrical Spec.				Note
				Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	-	26.000000			MHz	
2	Oscillation Mode	-	-	Fundamental				
3	Load Capacitance	CL	-	-	7	-	pF	
4	Frequency Tolerance	-	$+25^{\circ}\text{C} \pm 3^{\circ}\text{C}$	± 10			ppm	
5	Frequency Stability Over Operating Temp. Range(Reference 25°C)	-	-29 to $+85^{\circ}\text{C}$	± 10			ppm	
6	Operating Temperature	-	-	-30	~	+85	$^{\circ}\text{C}$	
7	Aging	-	first year	± 0.7			ppm	
		-	second year	± 1.4			ppm	
		-	after 5 years	± 2.5			ppm	
		-	after 10 years	± 5.0			ppm	
8	Frequency drift after reflow (After two reflows)	-	within 4 hrs	± 2			ppm	
9	Inflection point (Ti)	-	T0 -C2/3C3	28.5 ± 1.5			-	
10	T0	-	-	25			-	
11	Drive Level	DL	-	-	-	100	μW	
12	Equivalent Series Resistance	ESR	-	-	-	30	Ω	
13	Spurious Mode Resistance	-	± 1 MHz	500	-	-	Ω	
14	Insulation Resistance	-	at DC 100V	500	-	-	M Ω	
15	Storage Temperature Range	-	-	-40	-	+85	$^{\circ}\text{C}$	
16	DLD2	-	-	-	-	2.5	Ohms	1
17	FDDL	-	-	-	-	2.0	ppm	
18	DLDH2	-	-	-	-	1.5	Ohms	
19	FDLDH	-	-	-	-	0.7	ppm	
20	Pulling Sensitivity	TS	-	$28 \pm 10\%$			ppm/pF	



CRYSTAL ELECTRICAL SPECIFICATIONS

	Parameters	Symbol	Condition	Electrical Spec.				Note
				Min.	Typ.	Max.	Units	
21	Frequency Perturbation	-	-	-	-	±0.5	ppm	4
22	G Sensitivity	-	-	-	-	2	ppb/g	2
23	Full Cycle Temperature Hysteresis	-	-	-	-	0.5	ppm	3
24	S curve 3 order curve fitting coefficient (T0=25°C)	C1	-	-0.4	-0.25	-0.1	ppm/°C	
		C2	-	-0.0012	-0.0009	-0.0005	ppm/°C ²	
		C3	-	0.000087	0.000099	0.00011	ppm/°C ³	
25	Residual slope (3 order curve fitting under per 2°C test)	-	-10°C~60°C	±0.05			ppm	
		-	-30°C ~85°C	±0.1			ppm	
26	Frequency stability slope 1 (Measured every 1°C) (Temp. rate: ~1.0°C/min) (Fit with fifth-order polynomial)	-	-30°C ~85°C	±50			ppb	
27	Frequency stability slope 2 (Measured every 0.5°C) (Temp. rate: ~1.0°C/min) (Fit with fifth-order polynomial)	-	(5°C small cycle)	±50			ppb	
28	Frequency hysteresis (Measured every 0.5°C) (Temp. rate: ~1.0°C/min) (Average magnitude difference between FT data)	-	(-30-> -25-> -30°C) (-5-> 0-> -5°C) (25-> 30-> 25°C) (55-> 60-> 55°C) (75-> 80-> 75°C)	-	-	100	ppb	

Note 1 10nW~100uW, step ratio is $\sqrt{10}$

Note 2 Gamma vector of all three axes from 30 Hz to 1.5 KHz (guarantee by design)

Note 3 Difference in freq. measurement at any temperature when undergoing a thermal cycle over the entire operation temperature range from -40°C to +85°C for each 2 degree (guarantee by design)



Note 4 Residual error from the freq. vs. temperature curve fit 3rd order. Min. of 1 freq. reading per 2 degree C over operation temperature

NTC THERMISTOR ELECTRICAL SPECIFICATIONS

	Parameters	Symbol	Condition	Electrical Spec.				Note
				Min.	Typ.	Max.	Units	
1	Resistance (25 °C)			100k ± 1%			Ω	
2	B-Constant (25-50 °C)			4250 ± 1%			K	1
3	Size			0201				

Note 1 The B constant is calculated using the zero-power resistance values measured at 25°C and 50°C

DIMENSIONS

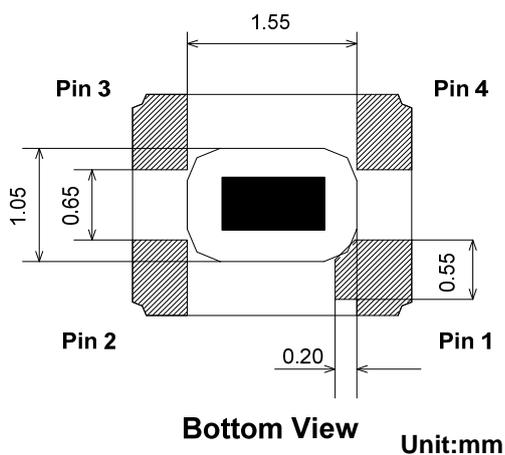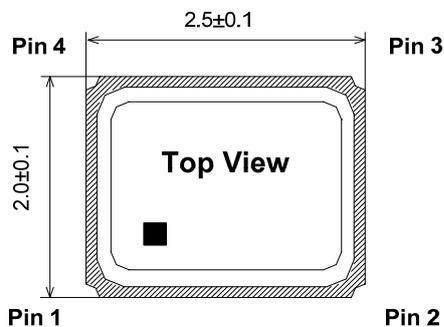


PIN FUNCTION

	Symbol	Function
Pin 1	XT1	XTAL Terminal 1
Pin 2	RT2	Thermistor Terminal 2
Pin 3	XT2	XTAL Terminal 2
Pin 4	RT1	Thermistor Terminal 1


Note: Pin 2 is connected to the metal lid and thermistor
Pin 4 is connected to the thermistor only

BLOCK DIAGRAM

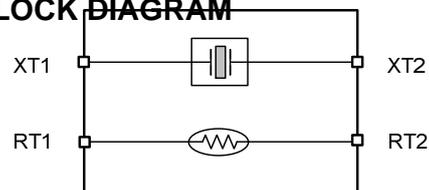


Note: RT2 shall be connected to GND is recommended

SUGGESTED LAYOUT

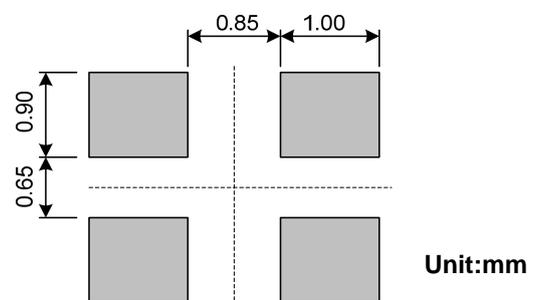


■ SUGGESTED REFLOW PROFILE

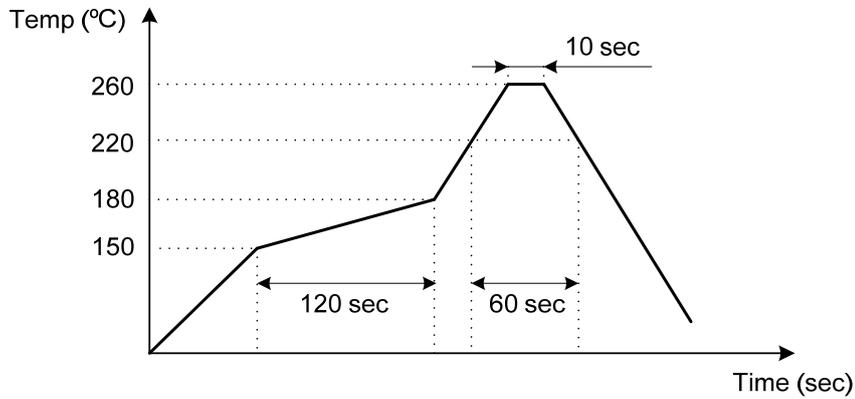

Note : Total Time: 200 sec. Max., Solder Melting Point: 220°C


■ MARKING

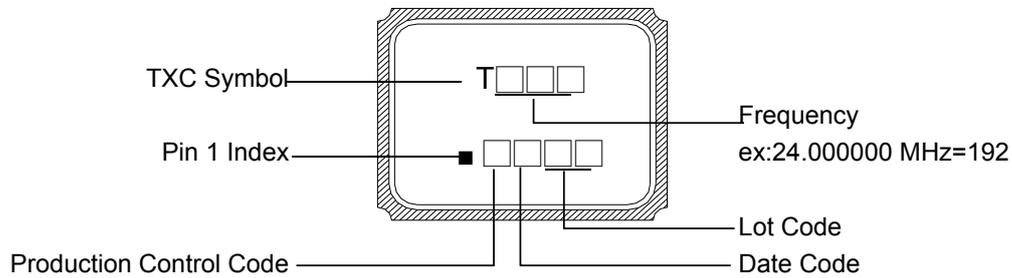

DATE CODE




				MONTH											
YEAR				JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2005	2009	2013	2017	A	B	C	D	E	F	G	H	J	K	L	M
2006	2010	2014	2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2007	2011	2015	2019	a	b	c	d	e	f	g	h	j	k	l	m
2008	2012	2016	2020	n	p	q	r	s	t	u	v	w	x	y	z

Note: This date code will be cycled every four years

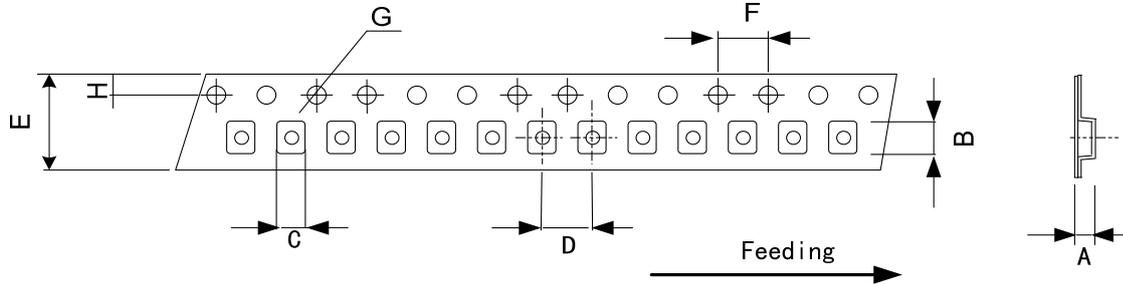PACKING :


DIMENSIONS	A	B	C	D	E	F	G	H	
	1.15	2.70	2.25	4.00	8.00	4.00	1.55	1.75	
	±0.05	±0.05	±0.05	±0.10	±0.20	±0.10	±0.05	±0.10	(UNIT:mm)


REMARK :

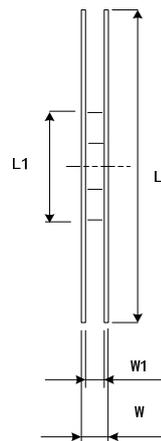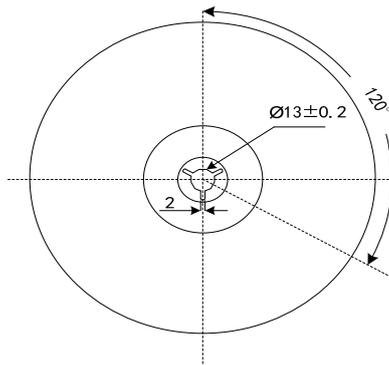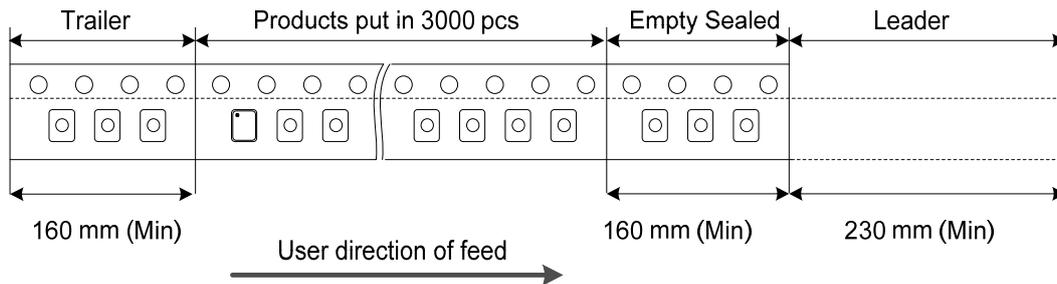

DIMENSIONS	L	L1	W	W1	
	178	60.2	11.5	8	Standard Reel Quantity is 3,000 pcs per (UNIT:mm)
	±1	±0.5	±0.2	+1/-0	

■ STRUCTURE ILLUSTRATION

Crystal Enclosure Seal : Seam Welding

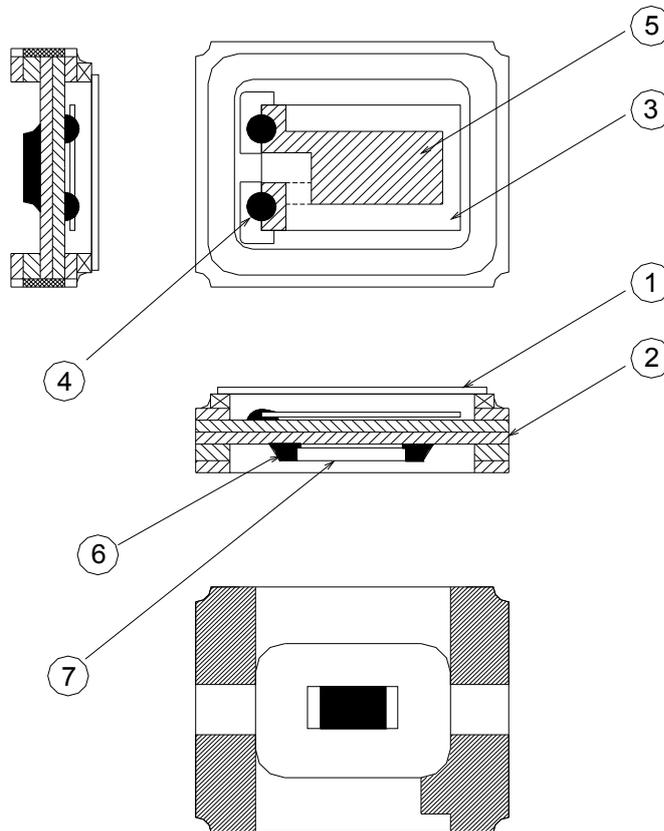

No.	COMPONENTS	MATERIALS	FINISH/SPECIFICATIONS
1	Lid	Metal (Fe+Co+Ni)	-
2	Base (Package)	Ceramic (Al ₂ O ₃) + Kovar (Fe+Co+Ni) + Ag/Cu	Alumina Ceramics
3	Crystal Blank	SiO ₂	-
4	Conductive Adhesive	Ag	Silicone Resin
5	Electrode	Noble Metal	-
6	Solder	Sn	-
7	Thermistor	Al ₂ O ₃ , Ag, Ni	-

RELIABILITY SPECIFICATIONS

1. Mechanical Endurance

No.	Test Item	Test Methods	Reference
1.1	Drop Test	150 cm height, 3 times on concrete floor.	JIS C6701
1.2	Mechanical Shock	Device are shocked to half sine wave (1000 G) three mutually perpendicular axes each 3 times. 0.5 msec. duration time	MIL-STD-202
1.3	Vibration	Frequency range 10 ~ 2000 Hz Amplitude 1.52 mm/20 G Sweep time 20 minutes Perpendicular axes each test time 4 Hrs (Total test time 12 Hrs)	MIL-STD-883
1.4	Gross Leak	Standard sample for automatic gross leak detector Test pressure: 2 kg / cm ²	MIL-STD-883
1.5	Fine Leak	Helium bombing 4.5 kg/ cm ² for 2 Hrs	
1.6	Solderability	Temperature 245°C ± 5°C Immersing depth 0.5 mm minimum Immersion time 5 ± 1 seconds Flux Rosin resin methyl alcohol solvent (1 : 4)	MIL-STD-883

2. Environmental Endurance

No.	Test Item	Test Methods	Reference
2.1	Resistance To Soldering Heat	Pre-heat temperature 125°C Pre-heat time 60 ~ 120 sec. Test temperature 260 ± 5°C Test time 10 ± 1 sec.	MIL-STD-202
2.2	High Temp. Storage	+ 125 °C ± 3 °C for 500 ± 12 Hrs	MIL-STD-883
2.3	Low Temp. Storage	- 40°C ± 3°C for 500 ± 12 Hrs	
2.4	Thermal Shock	Total 100 cycles of the following temperature cycle 	MIL-STD-883
2.5	High Temp & Humidity	85°C ± 3°C, RH 85% , 500 Hrs	JIS C5023